


# PER-C30F

## Mini PCI 3-port IEEE1394a Module

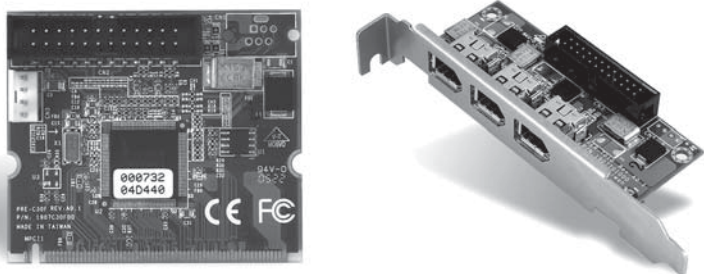

### Features

- Supports Three IEEE1394a Ports Up to 400Mbps
- TI Single Chip for IEEE1394a Solution

### Specifications

Form Factor	Mini PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
IEEE1394a Chipset	TI TSB43AB23
Power Requirement	+3.3V, +5V, +12V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

### Ordering Information


- TF-PER-C30F-A10**  
Mini PCI 3-port IEEE1394a Module Rev. A1.0
- PER-C30F-A10**  
Mini PCI 3-port IEEE1394a Module Rev. A1.0

### Packing List

- PER-T010 daughter board
- Quick Installation Guide
- PER-C30F

# PER-V01B

## Mini PCI DVI to TTL Module

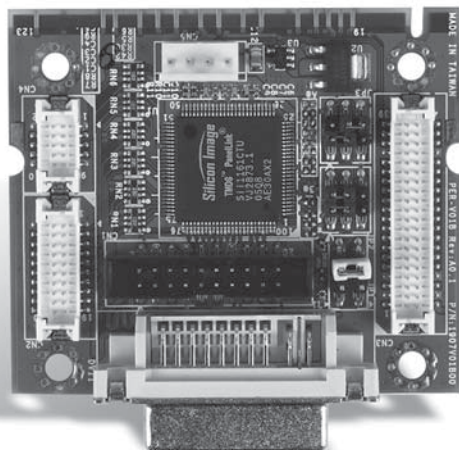

### Features

- Supports DVI to TTL LCD Signals Conversion
- Resolution Supports up to 1024 x 768

### Specifications

Form Factor	Mini PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
Signal Conversion Chipset	Silicon Image Sil1160CTU
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

### Ordering Information

- TF-PER-V01B-A10**  
Mini PCI DVI to TTL LCD Signal Conversion Module for 640x480 Panel Rev. A1.0
- TF-PER-V01B-A10-01**  
Mini PCI DVI to TTL LCD Signal Conversion Module for 800x600 Panel Rev. A1.0
- TF-PER-V01B-A10-02**  
Mini PCI DVI to TTL LCD Signal Conversion Module for 1024x768 Panel Rev. A1.0
- PER-V01B-A10**  
Mini PCI DVI to TTL LCD Signal Conversion Module for 640x480
- PER-V01B-A10-01**  
Mini PCI DVI to TTL LCD Signal Conversion Module for 800x600
- PER-V01B-A10-02**  
Mini PCI DVI to TTL LCD Signal Conversion Module for 1024x768

### Optional Accessories

- 1703200151**  
20P-20P Terminal Cable

### Packing List

- Quick Installation Guide
- PER-V01B