


NIM-S26A

Intel® XL710 PCI-Express 10G SFP+ 4 Ports Module

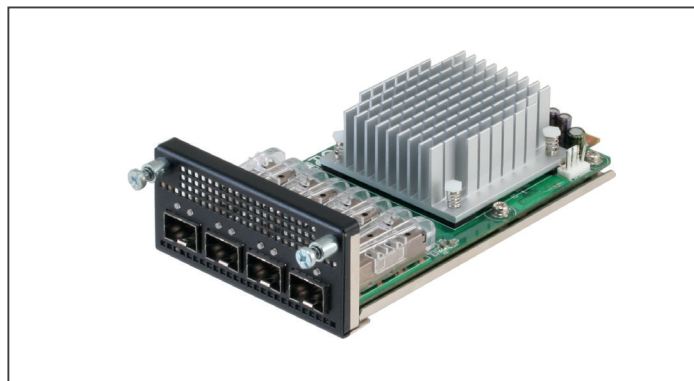

Features

- PCI-Express Host Interfaces
- 10G SFP+ Fiber Port x 4



Network Appliance Options

- FWS-8500

Specifications


| Main Specification | |
|--------------------|--------------------------------------|
| Form Factor | 10G Fiber Module |
| Main Chipset | Intel® XL710 Ethernet Controller x 1 |
| Bypass | — |
| Host Interface | PCI-Express [x8] |
| LAN Port | SFP+ 10 GbE Connector x 4 |
| Indicator | LED x 4 for Active/Link |
| Qualification | CE/FCC Class A |
| Operation Temp. | 32°F ~ 104°F (0°C ~ 40°C) |
| Dimension | 5.71" x 3.03" (145mm x 77mm) |

Ordering Information

- **NIM-S26A-A10-01**
Intel® XL710 PCI-Express 10G SFP+ 4 Ports Module for FWS-8500

NIM-S26B

Intel® XL710 PCI-Express 40G QSFP 2 Ports Module

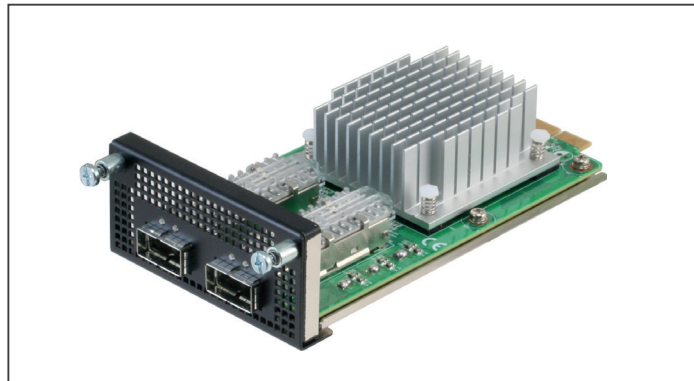

Features

- PCI-Express Host Interface
- 40 GbE QSFP Fiber Port x 2



Network Appliance Options

- FWS-7360
- FWS-7830
- FWS-7831
- FWS-7821
- FWS-7820
- FWS-7520
- FWS-8600
- FWS-8500

Specifications

| Main Specification | |
|--------------------|--|
| Form Factor | 40G Fiber Module |
| Main Chipset | Intel® Fortville XL710 Ethernet Controller x 1 |
| Bypass | — |
| Host Interface | PCI-Express [x8] |
| LAN Port | QSFP 40GbE Connector x 2 |
| Indicator | LED x 2 for Active/Link |
| Qualification | CE/FCC Class A |
| Operation Temp. | 32°F ~ 104°F (0°C ~ 40°C) |
| Dimension | 5.71" x 3.03" (145mm x 77mm) |

Ordering Information

- **NIM-S26B-A10-01**
Intel® XL710 PCI Express 40GbE QSFP 2 Ports Module for FWS-8500
- **NIM-S26B-A10-F20-0002**
Intel® XL710 PCI Express 40GbE QSFP 2 Ports Module for FWS-7820/7821/7830/7831/7360/8600
- **NIM-S26B-A10-F20-0001**
Intel® XL710 PCI Express 40GbE QSFP 2 Ports Module for FWS-7520