AAEON® *an ASUS assoc. co.*

Rugged Docking Station (For RTC-700B/M/RK)

Rugged Tablet Computers

USB x 2

RJ-45

DC-in

RS-232

USB x 2

Features

- Simple, Smooth Design For Easy Cleaning
- Flexible for User to Tilt A Suitable Viewing Angle
- USB x 4, and Ethernet Ports Extension, COM Port and DC-IN
- LED Indicate Charging Status
- 75mm VESA Hole Pattern Supports Mounting
- Easy to Install, For Quick Repair & Ease in Maintenance
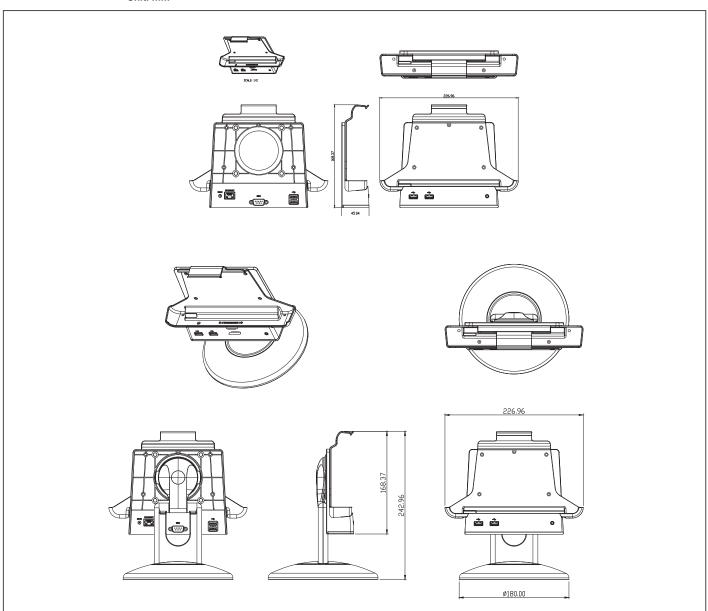- Expandable to Fit RTC-700 Series Tablets

USB 2.0 c(UL)us CLASSIFIED CE FC

Specifications

System	OFFICE DOCKING STN FOR RTC-700X
I/O	USB 2.0 x 4, RJ-45 jack for 10/100Base-TX Ethernet x 1, RS-232 x 1
DC Input	DC in 12V
LED Indicator	Orange: DC in w/o Tablet, Blue: DC in w/ Tablet Ethernet status: Green LED indicates connection status
Mechanical	
Color	Black
Construction	PC
Dimensions (W x H x D)	9.57" x 8.94" x 11.02" (243mm x 227mm x 280mm)
Gross Weight	1.82 lb (0.83 kg)
Environmental	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	14°F ~ 122°F (-10°C ~ 50°C)
ESD	Air +/- 8KV, Contact +/- 4KV
EMC/ Safety	CE/FCC Class B/UL
Power Supply	
AC/DC Adapter	AC Power input: 100V-240V, 50Hz-60Hz, 36W DC Power output: 12V
DC/DC Adapter	—

Note: All specifications are subject to change without notice.

Dimension

Unit: mm

Ordering Information

Part Number	Applied Models	Stand	Expansion I/O
TF-RDS-0310-0000	For RTC-700 Series w/ Stand	Yes	COM x 1, USB x 4, LAN x 1
TF-RDS-0310-00002	For RTC-700 Series w/o Stand	No	COM x 1, USB x 4, LAN x 1