



Front View

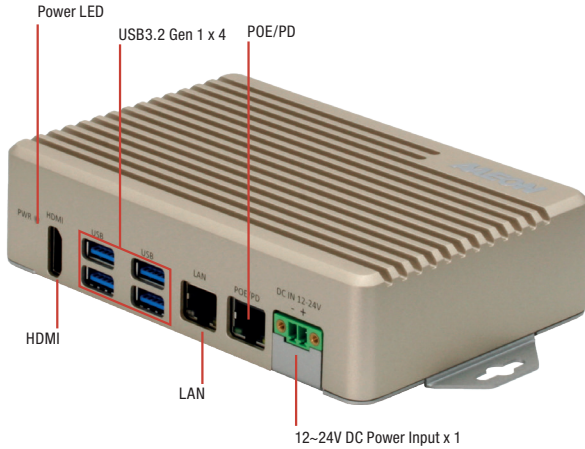

Rear View

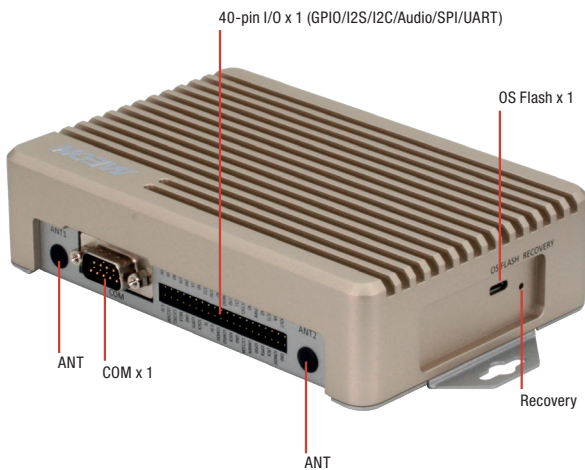

### Features

- NVIDIA Jetson Nano
- PoE/PD x 1
- 4GB LPDDR4 + 32GB SD card slot
- USB 3.2 Gen 1 x 4
- M.2 E-key slot x 1 for WiFi function expansion
- DC 12 ~ 24V wide voltage power input
- Wide working temperature -10°C ~ 70°C




### Specifications

System	
AI Accelerator	NVidia® Jetson Nano™
CPU	Quad Core ARM® Cortex®-A57 MPCore Processor
System Memory	4GB LPDDR4
Storage Device	32 GB MicroSD Card (Jetson Nano version B) Mini-Card (Full Size) x 1 (PCIe+SATA+USB)
Display Interface	HDMI 2.0 x 1
Ethernet	10/100/1000Base-TX x 2
I/O	USB3.2 Gen 1 x 4 (USB Type A) GbE LAN x 2 (GbE PD x 1 + GbE LAN x 1) 40-pin I/O x 1 (GPIO/I2S/I2C/Audio/SPI/UART) DB-9 (RS-232) x 1 HDMI 2.0 a/b x 1 (HDMI Type A) OS Flash port x 1 (Micro USB) Recovery port x 1 Antenna opening x 2
Expansion	Antenna x 2 M.2 2230 E Key x 1 (for Wi-Fi)
Indicator	Power LED x 1
OS Support	ACLinux 4.9 or above (Compatible with Ubuntu 18.04)
Power Supply	
Power Requirement	DC 12V~24V 2-pin terminal
Mechanical	
Mounting	Wallmount
Dimensions (W x D x H)	6.92" x 3.94" x 1.54" (175.8 mm x 100.0 mm x 39.0 mm)
Gross Weight	2.31 lbs (1.05 kg)
Net Weight	1.28 lbs (0.58 kg)
Environmental	
Operating Temperature	14°F ~ 158°F (-10°C ~ 70°C, according to IEC60068-2 with 0.5 m/s AirFlow)
Storage Temperature	-40°F ~ 176°F(-40°C ~ 80°C)
Storage Humidity	95% @ 40C, non-condensing
Anti-Vibration	Random, 3.5Grms, 5~500Hz
Certification	CE/FCC class A

### Dimension

Unit: mm

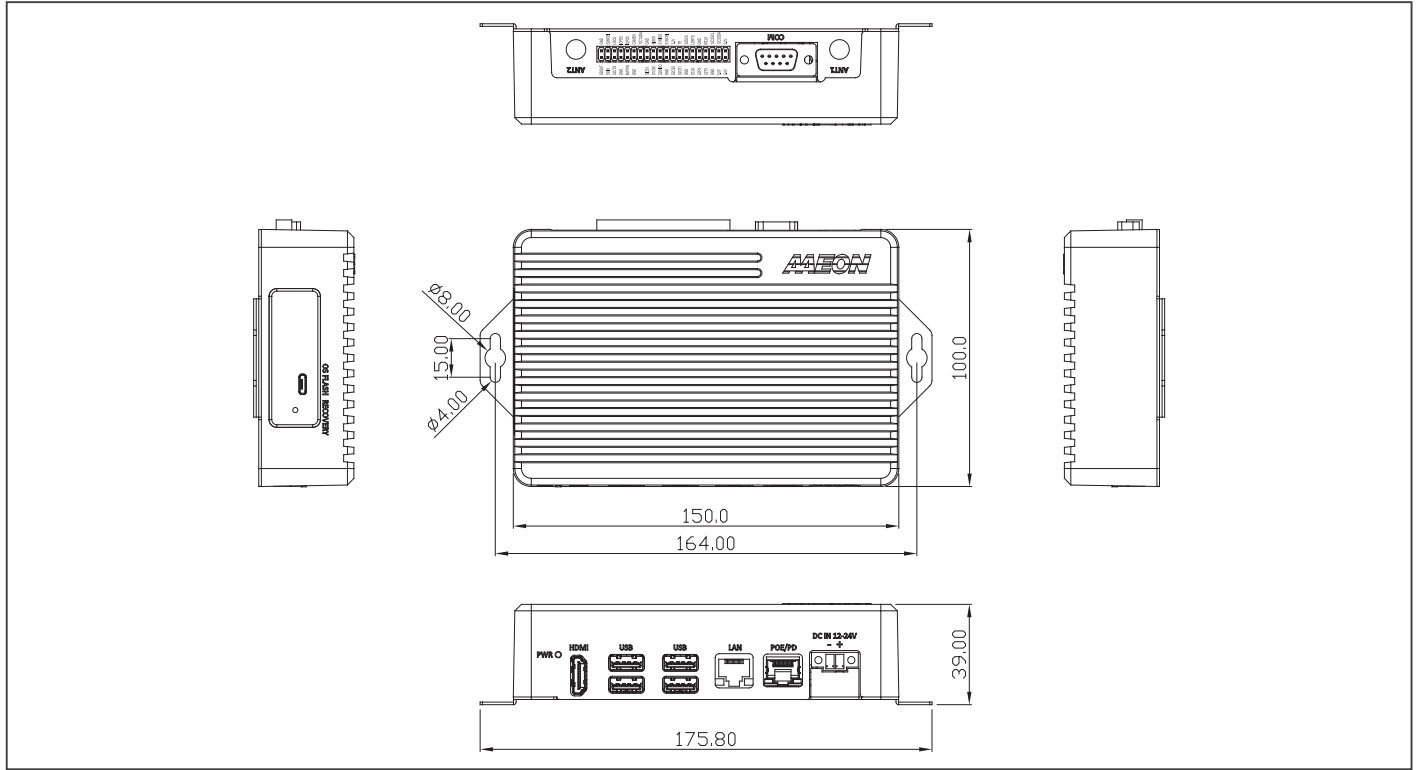

### Ordering Information

Part Number	AI solution	LAN	USB 3.2 Gen 1	RS-232	40-pin I/O	Storage	Expansion	Display	Mounting	Power	Operation temp.
BOXER-8222AI-A1-1010	Nvidia® Jetson Nano™	GbE PD x 1 GbE LAN x 1	4	1	3.3V x 2 pin, 5.0V x 2 pin, GND x 8 pin, I2C x 2, SPI x 2, I2S x 1, UART x 1, GPIO x 4	32 GB MicroSD Card x 1 Mini-Card (Full Size) slot x 1	M.2 E-key 2230 slot x 1	HDMI x 1	Wallmount	DC 12V~24V	-10°C ~ 70°C with 0.5m/s airflow

### Packing List

- Power Connector x 1
- BOXER-8222AI

### Optional Accessories

- 1255300611  
60W Power Adapter
- 1702031802  
Power Cord (US type)
- 1702031803  
Power Cord (European Type)
- 170203180E  
Power Cord (Japanese Type)